Datenblatt

gültig ab: 15.11.19

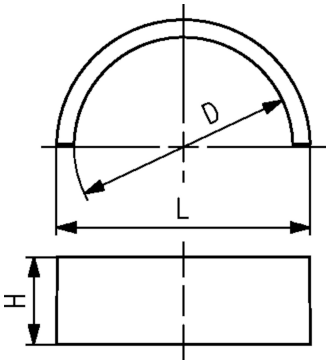

COOL-FIT 4.0F Festpunkt-Set

Ausführung:

- Vier PVC-U Halbschalen als unlösbare Verbindungen, übertragen die im Rohr auftretenden Kräfte auf den Festpunkt.
- Verwenden Sie zum Kleben Tangit RAPID, Tangit RAPID Mischer Set, Tangit RAPID Kartuschen Pistole
- Bitte beachten Sie die maximal zulässigen Kräfte für diese Ausführung in der untenstehenden Tabelle.
- **Festpunktschellen und Abspannpakete müssen bauseitig berechnet und beschafft werden. Diese sind nicht im Festpunktset von GF.**

D (mm)	d (mm)	Code	SP	Gewicht (kg)	L (mm)	H (mm)	max Force (kN)	closest inch (inch)
250	160	**738 912 321**	1	1.620	284	35	10.0	10
315	225	**738 912 323**	1	1.820	356	35	10.0	12

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
Phone +41 -(0)52-631 1111
e-mail: info.ps@georgfischer.com
Internet: http://www.gfps.com